


- 1- A plate of thickness  $L_1$  and conductivity  $k_1$  moves with a velocity  $U$  over a stationary plate of thickness  $L_2$  and conductivity  $k_2$ . The pressure between the two plates is  $P$  and the coefficient of friction is  $\mu$ . The surface of the stationary plate is insulated while that of the moving plate is maintained at constant temperature  $T_o$ . Determine the steady state temperature distribution in the two plates.

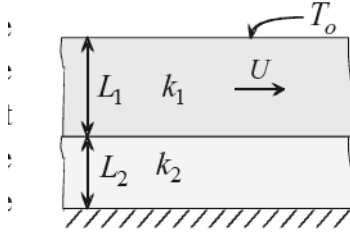

- 2- A circumferential fins of rectangular cross section area of thickness  $t$  and length  $L$  with thermal conductivity coefficient of  $k$  is installed on a pipe with outside radius of  $r_1$  as shown in figure 1.

The fin is subjected to an environment of temperature  $T_\infty$  and convection heat transfer coefficient of  $h$ . Obtain:

1. Fin temperature distribution
2. Rate of heat transfer
3. Fin efficiency
4. plot  $\eta$  verses  $L_c^{3/2} \left( \frac{h}{kA_m} \right)^{1/2}$  for  $\frac{r_{2c}}{r_1} \in \{1, 2, 3, 4, 5\}$  in a figure, where variables are :

$$L_c = L + t/2; \quad r_{2c} = r_1 + L_c; \quad A_m = t(r_{2c} - r_1)$$

5. compare the plot with results of Gardner that is plotted in figure 2-12 in text book of **Heat Transfer , J.P.Holman.**

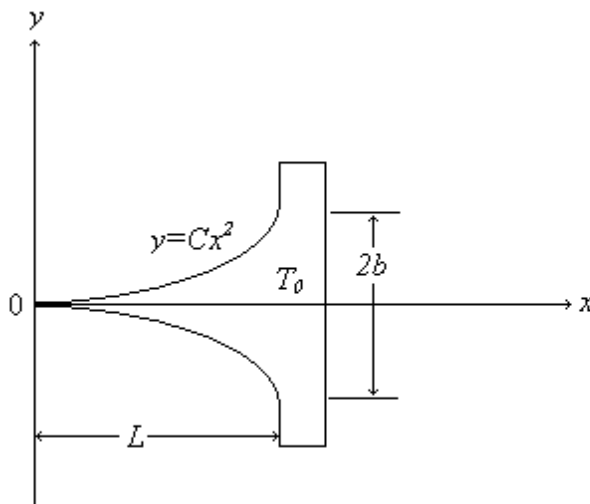


Fig.2

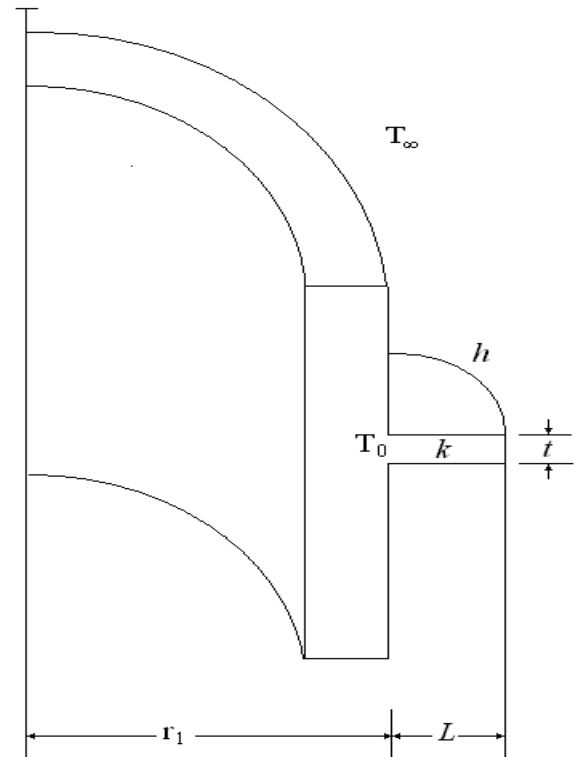


Fig.1

- 3- A straight fin of a parabolic profile of  $y=Cx^2$  ( $C$  is constant), is subjected to an environment of temperature  $T_\infty$ . As shown in figure 2, the fin length is  $L$  and its bases thickness is  $2b$ . The fin thermal conductivity is  $k$ , the heat transfer coefficient between the fin and the environment is  $h$  and the fin base temperature is  $T_0$ .
- (a) Find steady state temperature distribution of the fin.
  - (b) Calculate total heat transfer from the fin.